


MANUAL TRANSMISSION RANGE SHIFT

Use your truck's clutch when shifting between transmission ranges to prevent synchronizer damage.

Your Mack® truck may be equipped with either a Mack or Eaton brand transmission. In either case, you must engage the clutch when undergoing a range shift.

For Mack transmissions, double-clutch when shifting ranges.

For Eaton transmissions, clutch once when shifting ranges.

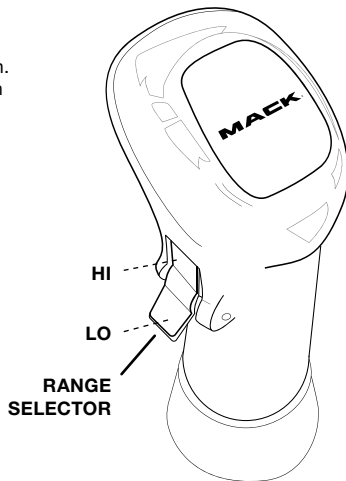

! Failure to clutch or double-clutch when range shifting may result in damage to your vehicle's synchronizer.

? Refer to the shift pattern sticker displayed on your vehicle's D-panel or sun visor to view the shift pattern and sequence unique to your truck's transmission.

